

VERSALIFT

VT66-250-FE

Chassis mounted
telescopic platform
with hydraulic elevator



Hydraulic lift elevator



Reach worksites up and
over obstacles



PTO driven hydraulic
pump



FPC controls with up to
4 actions at a time



1 kV certified low
voltage insulation



VERSALIFT

A **TIME** MANUFACTURING COMPANY

VT66-250-FE - MAN TGM




Features the sturdiest boom design available


A vast list of optional equipment is available, allowing you to customize the VT to meet your specific demands.

The Smartbox toolbox solution is available in many shapes and sizes.

■ Length: 8,720 mm ■ Height: 3,750 mm ■ Wheelbase: 4,125 mm

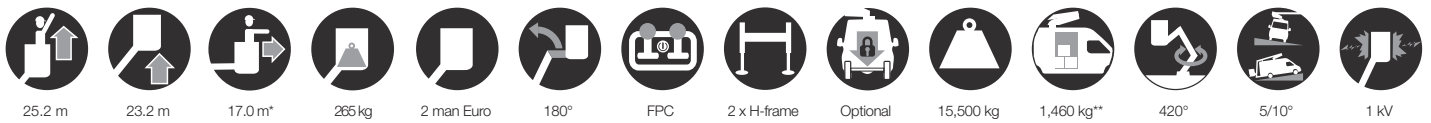


Diagramme(s)

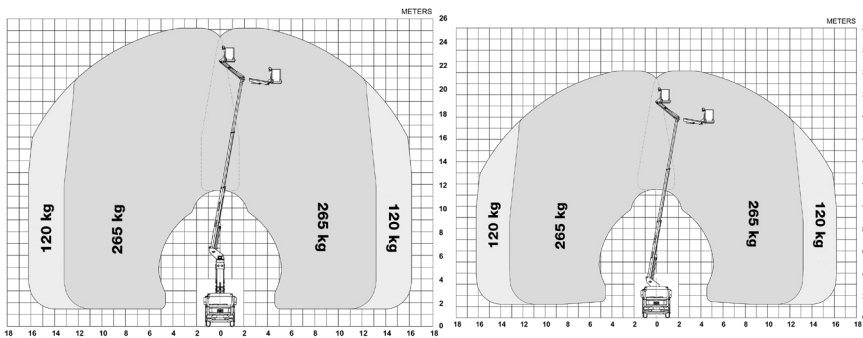

Options

- Cabinets for the chassis
- Workshop interior
- Tow bar
- Bucket rotator (2 x 85°)
- Extended bucket (replaces standard bucket)
- Drive option (drive the vehicle with raised platform)
- Load cell (Variable load dependant outreach)
- Home function & limited working area without outriggers



Reach worksites "up and over" obstacles



Hydraulic lift elevator (3 m)



Cabinets for the chassis (optional)



FPC (Full Proportional CANbus controls): Variable outreach (with load cell) and up to 4 actions at a time

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (260 kg added to the installation weight).

*** Reduced outreach and max 230 kg bucket capacity.

**** Requires the option "Limited working area without outriggers".

Distributor

Versalift International
Soendervang 3, 9640 Farsøe
Denmark

+45 9863 2433
sales@versalift.dk
versaliftinternational.com